

Radio Receiver/Cassette Player (Up To '96 MY) - Remove And Install (38 222 0)


Proprietary Tools

Radio removal tool

Remove

Note:


Ensure the radio key code is available before disconnecting the radio receiver/cassette player multiplugs and note the radio station presets.

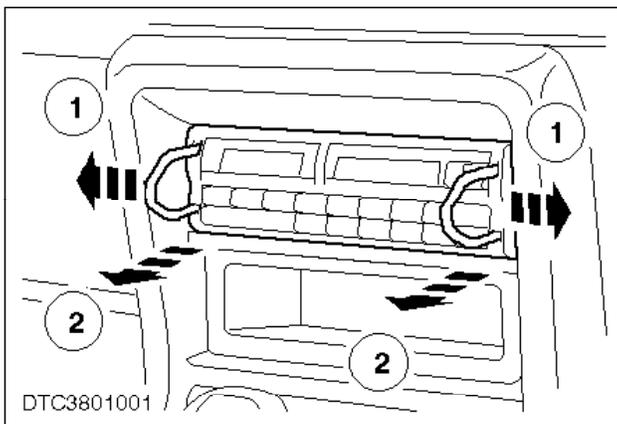

1. Remove the radio receiver/cassette player.

Insert the radio removal tools into the locating holes until they click into place.


- 1 Pull the tools gently to the left and right of the unit to release the locking tangs.
- 2 Pull unit gently out of the crash pad/facia.

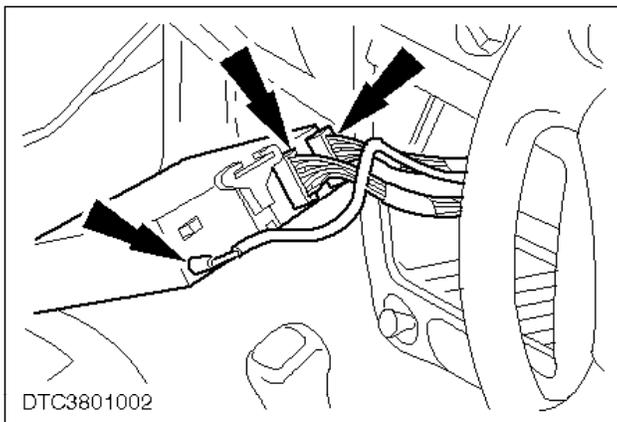

CAUTION:

When disconnecting the multiplugs, do not pull on the wiring; pull on the multiplug body.

2. Disconnect the multiplugs and antenna lead and remove the unit.

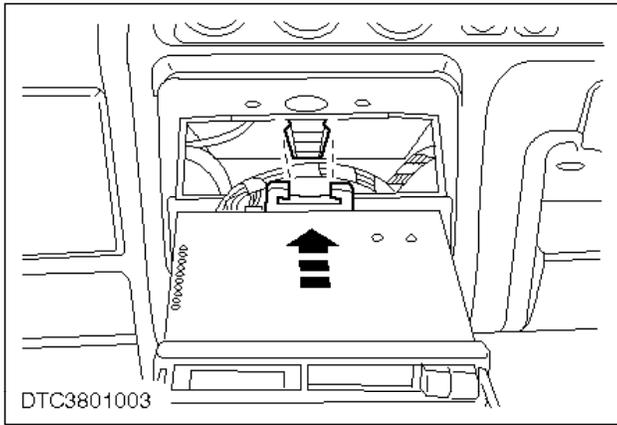

Install

3. Refit the components in reverse order.

Note:

Ensure the rear support engages on the carrier when refitting the radio receiver/cassette player.

Input the radio key code (refer to VSTM Section 38 Audio Systems) and re-enter radio station presets.
